



P515-800

B-Series, D-Series



Interchangeable Cylinder Assembly Instructions
Instrucciones de ensambla de cilindros intercambiables
Notice d'assemblée d'cylindres interchangeables

Full Size IC (FSIC)

Small Format IC (SFIC)

1* **2** **3** **4**

*Control Key
*Llave de control
*Clef d'contrôle

6

5

(B562/D231 SFIC see reverse/vea el revés/voir l'inverse)
(FSIC see reverse/vea el revés/voir l'inverse)


SFIC Only: Insert Driver Bar & Turn It Towards
Extended Deadbolt in Door Edge

SFIC Solamente: Inserte la barra de impulsora
y la vuelta hacia el cerrojo
extendido en borde de la puerta

SFIC Seulement: Insérer la barre de transmission
et le tourner vers le pêne dormant
prolongé en bord de porte

Return to Lock Installation
Vuelve al instalación de la cerradura
Revenir à l'installation de serrure

Customer Service
1-877-671-7011
www.allegion.com/us





**B562/D231
Double SFIC Cylinder Only
Cilindros SFIC Doble Solamente
Double Cylindre de SFIC Seulement**

NOTE: Driver bars must overlap inside deadbolt


NOTA: Las barras deben traslapar adentro el cerrojo

NOTE: Les barres doivent recouvrir à l'intérieur de le pêne dormant

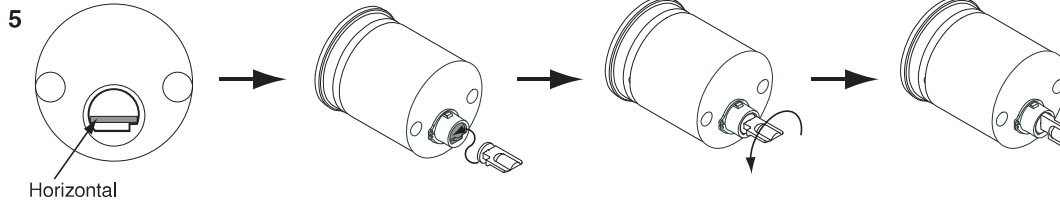


Return to Front
Vuelva al frente
Revenir à l'avant

**Double FSIC Cylinder Only
Cilindros SFIC Doble Solamente
Double Cylindre de SFIC Seulement**



**5 Determine Driver Bar Length
Determine el tamaño de la barra impulsora
Determiner la longueur de la barre de transmission**



Measure Door Width
Mida el grosor de la puerta
Mesurer l'épaisseur de la porte


2" or 1½" (38mm) EXT
ou

1¾" (44mm)

1⅝" (41mm)



EXT = Optional Extender Rings
Anillos extensibles opcionales
Anneaux de prolongation facultatifs



1⅝" (41mm) EXT

1⅝" (35mm) EXT

or 1⅞" (48mm)

Break Bar as Indicated

Rompa la barra según lo indicado
Casser la barre comme indiqué



© Allegion 2014
Printed in U.S.A.
P515-800 Rev. 01/14-c